


You have decided to buy a watch, which was assembled by a watchmaker using a Ronda movement. Please note that no watches are produced or distributed under the Ronda Brand.

**In case of repairs, guarantee claims and questions concerning the functioning of a watch, purchasers and consumers should contact their retailer or the watch manufacturer, for which the relevant information can be found in the sales or guarantee documentation provided with the watch.**

**Description of the display and control buttons**

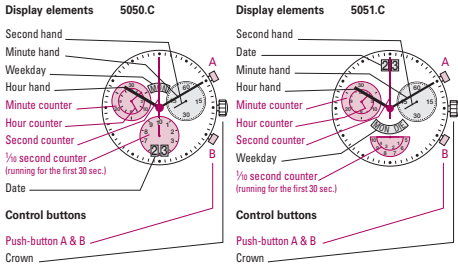

01 Crown

**Chronograph: Basic function**

(Start / Stop / Reset)

- Example:
- Start:** Press push-button A.
  - Stop:** to stop the timing, press push-button A once more and read the chronograph counters: **4h / 20 min / 38 sec / 1/2 sec**
  - Zero positioning:** Press push-button B. (The chronograph hands will be reset to their zero positions.)

05

**Chronograph: Accumulated timing**

- Example:
- Start:** (start timing)
  - Stop:** (e.g. 15 min 5 sec following 1)
  - Restart:** (timing is resumed)
  - Stop:** (e.g. 5 min 12 sec following 3) = 20 min 17 sec (The accumulated measured time is shown)
  - Reset:** The chronograph hands are returned to their zero positions.
- Please note:** Following 4, the accumulation of the timing can be continued by pressing push-button A (Restart / Stop, Restart / Stop, ...).

06

**Setting the time**

- Pull out the crown to position III (the watch stops).
  - Turn the crown until you reach the correct time 8:45.
  - Push the crown back into position I.
- Please note:**  
\* In order to set the time to the exact second, 1 must be pulled out when the second hand is in position «60». Once the hour and minute hands have been set, 2 must be pushed back into position I at the exact second.

02

**Chronograph: Intermediate or interval timing**

- Example:
- Start:** (start timing)
  - Display interval:** e.g. 20 minutes 17 seconds (timing continues in the background)
  - Making up the measured time:** (the chronograph hands are quickly advanced to the ongoing measured time).
  - Stop:** (Final time is displayed)
  - Reset:** The chronograph hands are returned to their zero position
- Please note:** Following 2, further intervals or intermediates can be displayed by pressing push-button B (display interval / make up measured time, ...).

07


**Setting the date (quick mode)**

- Pull out the crown to position II (the watch continues to run).
  - Turn the crown until the correct date 1 appears.
  - Push the crown back into position I.
- Please note:**  
During the date changing phase between approx. 9 PM and 12 PM; the date must be set to the date of the following day.  
An extreme acceleration in setting the date with quick mode can induce a false date indication. The synchronization is re-established by setting the date from 01 till 31 (crown in position II).

03

**Adjusting the chronograph hands to zero position**

- Example:  
One or several chronograph hands are not in their correct zero positions and have to be adjusted (e.g. following a battery change).
- Pull out the crown to position III (all chronograph hands are in their correct or incorrect zero position).
  - Keep push-buttons A and B depressed simultaneously for at least 2 seconds (the second counter hand rotates by 360° → corrective mode is activated).

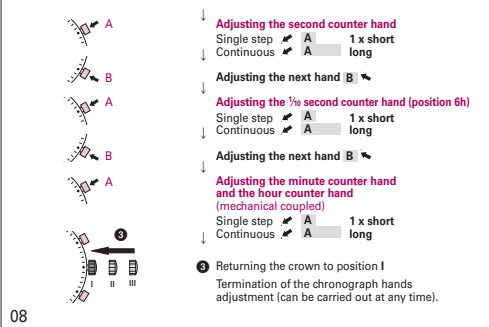

08

**Setting the date, weekday and time**

- Example:  
- Date / time on the watch: 17 / 01:25  
- Present date / time: 23 / 20:30
- Pull out the crown to position III (the watch stops).
  - Turn the crown until yesterday's weekday 17 appears.
  - Push the crown to position II.
  - Turn the crown until yesterday's date appears 23.
  - Pull out the crown to position III (the watch stops).
  - Turn the crown until the correct date 23 and weekday 17 appears.
  - Continue to turn the crown until the correct time 8:30 PM appears.
  - Push the crown back into position I.
- Please note:**  
\* To set your watch to the exact second, please refer to the chapter entitled «setting the time».  
\*\* Please observe the AM/PM clock rhythm.

04